


## 射频同轴转接器/ RF Coaxial Adapter

### XQY-SMA-SSMA-KKGD

| 项目 Project                         | 指标 Indicators                     |
|------------------------------------|-----------------------------------|
| 产品名称 Product Name                  | 射频转接器/RF Adaptor                  |
| 频率范围 Frequency Range               | DC-26.5GHz                        |
| 驻波比 VSWR                           | 1.25:1 (max)                      |
| 阻抗 Impedance                       | 50 $\Omega$                       |
| 插入损耗 Insertion Loss                | 0.30dB (max)                      |
| 介质耐电压 Dielectric withstand voltage | 1000 V                            |
| 使用寿命 Service life                  | $\geq 500$                        |
| 绝缘电阻 Insulation Resistance         | $\geq 5000M\Omega$                |
| A 接头类型 A connector type            | SMA-Female                        |
| B 接头类型 B connector type            | SSMA-Female                       |
| 工作温度 Operation Temperature         | -55°C ~ +165°C                    |
| 内导体材质 Inner conductor material     | 铍青铜 镀金 White Bronze Gold Plating  |
| 外导体材质 External conductor material  | 不锈钢 钝化 Stainless Steel Passivated |
| 绝缘体 Insulator                      | PTFE                              |

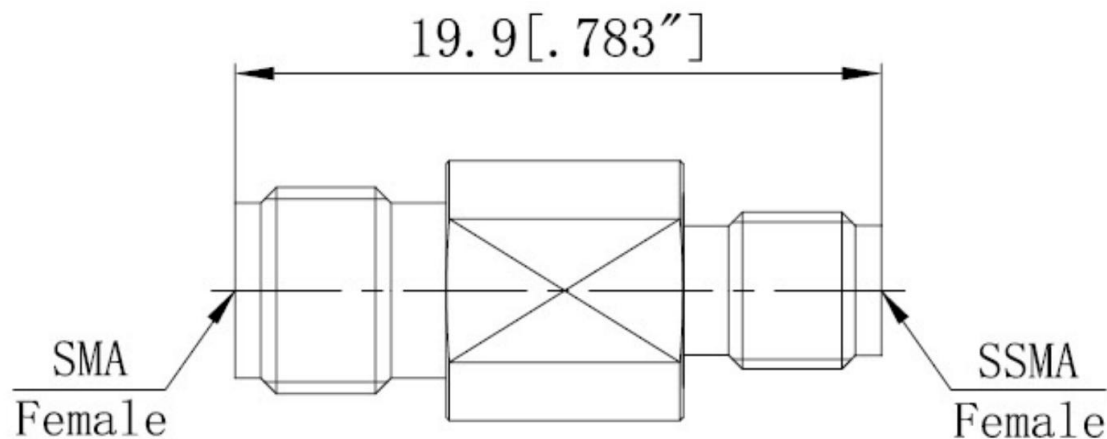

注: 尺寸(mm/[英寸]) , 一般公差( $\pm 0.05$ )

Note: Dimensions (mm / [inch]), General tolerance ( $\pm 0.05$ )